


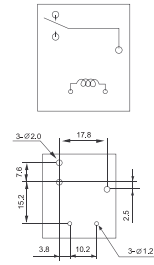

PCB Power Relays

K93

Style		PCB
Dimension L*W*H in mm		32.2 X 27.6 X 20
Weight		Approx 34gm.
CONTACT		
Configuration		1A / 1C
Contact Rating		30A / 240VAC 30A / 28VDC
Contact Material		Silver Alloy
COIL		
Nominal Coil Voltage (V)	DC	3 ~ 48V
	AC	-
Power Consumption		0.93W
Coil Resistance (Ω)		12VDC - 160 Ohms 24VDC - 660 Ohms
GENERAL DATA		
Dielectric Strength	Between Contacts	2000 VAC, 50Hz / min
	Between Contacts & Coil	1500 VAC, 50Hz / min
Insulation Resistance at 500 VDC to 25°C RH 50		100 MΩ
Ambient Temperature		-40°C ~ +85°C
Life Expectancy (Operations)	Electrical	1x10 ⁵
	Mechanical	1x10 ⁷
Mounting Diagram in (mm)		
Cross Reference :		OMRON-G8P, GOODSKY - GU


LEO KROME

®

®

LEO KROME

LEO®

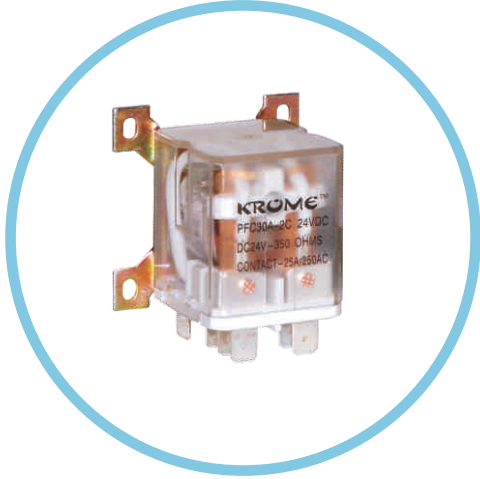

Your product
will be here